






Relay Box – Wiegand Reader

	BF-50	Relay Box for exit button, door sensor, lock, wiegand reader BF-50 can store extra 50 sets of card numbers for backup
	WR-E1/E2/M1/M2 Weather Proof	E = EM 125Khz, M = Mifare DESFire 13.56 Mhz Case : Narrow = 1 or Wide = 2 Color : Silver or Black
	WR-E3/M3/H3 Weatherproof	E = EM 125Khz, M = Mifare DESFire 13.56 Mhz, H = HID 125Khz Size : 88 x 88 x 18 mm
	WR-M5 Weatherproof	M = Mifare DESFire 13.56 Mhz; Optional : BLE & NFC Size : 84.2 x 93.7 x 20 mm, OSDP Support
	TWR-M5 Weatherproof	Card + Password M = Mifare DESFire 13.56 Mhz; Optional : BLE & NFC Size : 84.2 x 93.7 x 20 mm, OSDP Support
	WebPass Lite IP54	Card + Password E = EM 125Khz, M = Mifare DESFire 13.56 Mhz, H = HID 125Khz Size : 120 x 80 x 28 mm






Zone Management Digital Input & Output Controller

	BF-1010 BF-2300	BF-1010 : 10 DI and 10 DO (Master & Slave structure) BF-2300 : 12 DI and 6 DO
	CYT-133SC CYT-133GC(3G/4G)	CYT-133SC : 3 DI and 3 DO CYT-133GC : 3G/4G version



Serial to TCP/IP Converter & Modules

	CYT-100MG Modbus Gateway	Modbus TCP to Modbus RTU/ASCII data transmission
	BF-430 (RS232 / 485) BF-431 (RS232 / 422)	Two directions data transmission between serial and TCP/IP. Serial port type selectable.
	BF-450M BF-440M BF-480M	BF-450M : 1 TTL, 1 COM BF-440M : 4 TTL, 4 COM BF-480M : 8 TTL, 8 COM






Accessories

	BioMini SFM-5020	BioMini : USB fingerprint scanner SFM-5020 : fingerprint module (module board + sensor)
	EM302 / MF302 MR303U MR6061U	EM302 / MF302 : EM card decoder / Mifare card decoder MR303U : Mifare card encoder / decoder MR6061U : UHF card decoder
	Card / Tag Wristband / Label	EM, TM, Mifare, HID, UHF
	UL-275 LK-1201A HM-K29	UL-275 : Magnetic Lock LK-1201A : Bolt Lock, Embedded type HM-K29 : Bolt Lock, Exposure type
	ABK-806A/B ABK-800A/B	ABK-806A/B : Infrared Sensor Exit Button ABK-800A/B : Exit Button A = narrow case , B = wide case

Finger Vein / Face Recognition

	CSS-722	10,000 User(Cards) / 65,000 Logs / 12,000 Finger Vein Capacity Finger Vein + Card + Password Match On Card (Mifare Only)
	BioSense-FA1	2,000 Users / 200,000 Logs Face + Card + Password



Biometrics Fingerprint (Fingerprint + Card + Password)

	BioSense-III-T IP65	9,590 Fingers / 10,000 Cards / 65,000 Logs Optional : Voice Indicator, NFC
	BioSense-III	9,590 Fingerprints / 20,000 Cards / 65,000 Logs Optional : 3G/4G, WiFi, USB, Voice Indicator
	BioSense-II	1,000 Fingerprints / 20,000 Cards / 38,000 Logs Optional : 3G/4G, WiFi, USB, Voice Indicator
	BioSense IP54 optional	9,590 Fingerprints / 20,000 Cards / 50,000 Logs OSDP Support Can switch to controller mode or dummy reader mode
	BF631W	9,590 Fingerprints / 20,000 Cards / 65,000 Logs Optional : 3G/4G, WiFi, USB, Voice Indicator

Proximity RFID Card (Card + Password)


	CSS-800 IP65	10,000 Cards / 65,000 Logs Optional : Voice Indicator, POE, NFC
	BF831W	20,000 Cards / 65,000 Logs Optional : 3G/4G, WiFi, USB, Voice Indicator
	BFMiniW	20,000 Cards / 65,000 Logs Optional : 3G/4G, WiFi, USB, Voice Indicator
	CSS-R11 IP65	20,000 Cards / 65,535 Logs Selectable Feature : NFC & BLE Optional : POE Relay Box(CSS-A11); Relay Box(CSS-A10)
	CSS-A10 CSS-A11(POE)	CSS-R11 Only CSS-A10 = Relay Controller CSS-A11 = POE Relay Controller
	WebPass IP54	20,000 Cards / 65,000 Logs Optional : POE
	SEMAC-S2	Multi Door (Up to 8 doors) ; OSDP Support 20,000 Cards / 65,000 Logs Power box version (Control Panel + Power Box + Adapter)
	SEMAC-D1/D2/D4 SEMAC-RO (relay extend module)	D1 : 1 door 2 ways ; 2 reader 1 relay D2 : 2 doors 2 ways ; 4 reader 2 relay D4 : 4 doors 1 way ; 4 reader 4 relay

Lift System & Floor Security

	SEMAC-S3-V3 Lift BF-50	Floor security up to 128 floors with BF-333 Wiegand structure/RS485 structure
	BF-333	Each unit manages 16 floors (Max 8 units for 128 floors)



ACCESS CONTROL SYSTEM
TIME ATTENDANCE SYSTEM
VIDEO MANAGEMENT SYSTEM
CLIENT SYSTEM
MONITOR SYSTEM
LIFT SYSTEM
PARKING SYSTEM



Finger Vein



Biometrics



Android



Proximity

ISO 9001:2015



<http://www.chiyu-t.com.tw>



Chiayi (HQ) , Taiwan
Tel/Fax : +886-5-2325465 / +886-5-2910918
Add: No. 293, Siwei Road, Chiayi City 60085 , Taiwan
Taipei Branch, Taiwan
Tel/Fax : +886-2-22783389 / +886-2-29998139
Shenzhen Branch, China
Tel/Fax : +86-755-82514171 / +86-755-27398787-205

CHIYU


School Attendance

- Event alerts & SMS message
- Student Campus Solution
- Centralized all data into one server



Parking Solution

- License plate snapshot feature
- Easy to install and user friendly
- 2.4G / UHF long range system

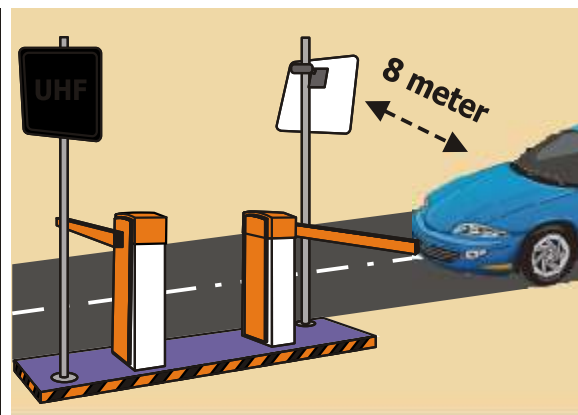

Lift Control

- Match on card unlimited user
- Up to 128 floors
- Hotel Application
- Which card goes to which floor




Remote Control

- Real time attendance log
- Centralized all attendance report
- Server & Client global connection




SMART DIO

- Monitor event & do actions
- Real time environment status
- Interact with video management system

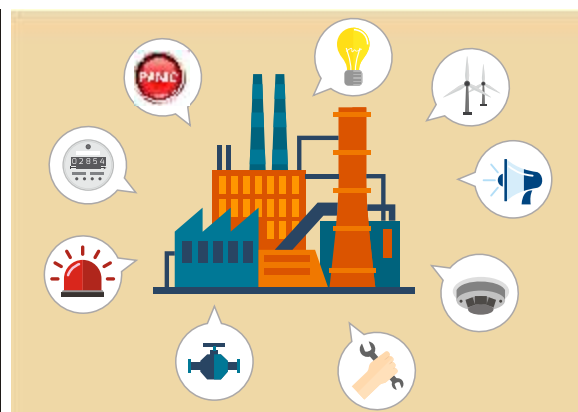


Total Solution: Video Management System Access Control System

CHIYU

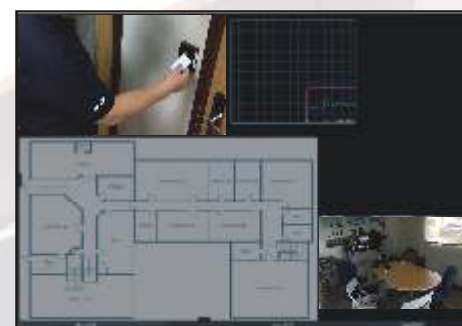

VMS E-MAP

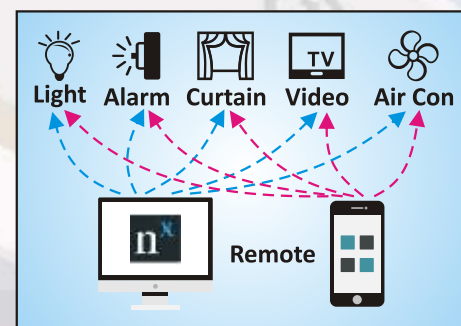


Soft trigger




Bookmark



Screen alert

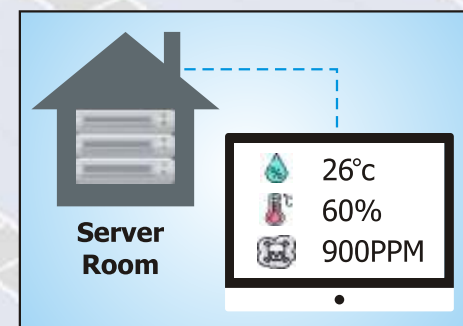

Text Overlay

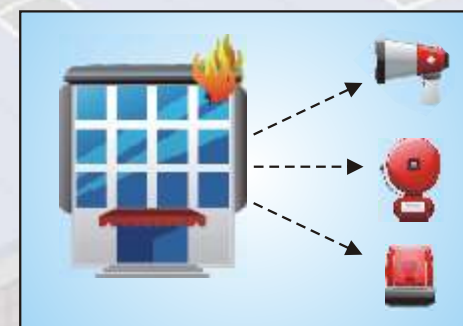

Event VS Action




SOMAC User Page



Monitor Image



SOMAC E-MAP

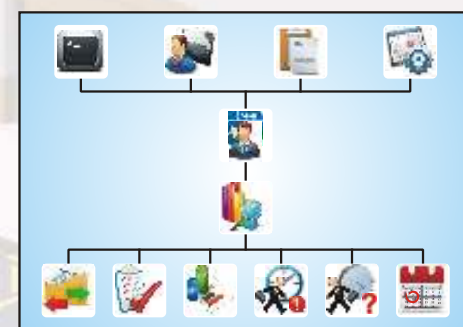

Time Attendance Report



Detail Report



Flexible Detail Report



Motion



Intruder



Temperature Humidity



Emergency Event



Power Shortage



Remote Air Condition



Energy Saving